



eitelux
Lighting technology

Luminaria vial LED
LED street light

VENICE

Descripción


Luminaria de alumbrado vial con un diseño moderno y estilizado adaptable a cualquier entorno urbano.

Fabricada en aluminio, cierre con cristal templado. Dispone de un sistema de apertura rápido para facilitar su mantenimiento. Superficie anti envejecimiento por pulverización electrostática y resistente a la corrosión.

Dispone de un grado de protección apto para ambientes marinos.

Altura de montaje de 3 a 12 metros.

Fotometrías/ Photometry

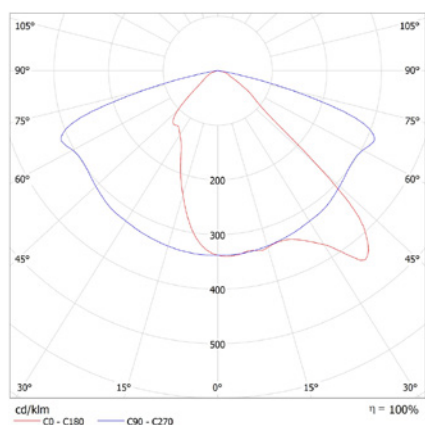


Description

LED Street light luminaire with a modern stylized design and adaptable to any urban environment. Made of aluminum, tempered glass closure. It has a fast opening system for an easy maintenance. Treated surface against aging by electrostatic spraying and corrosion resistant.

It has a degree of protection suitable for marine environments.

Mounting height from 3 to 12 meters.

Dimensiones/ Measures

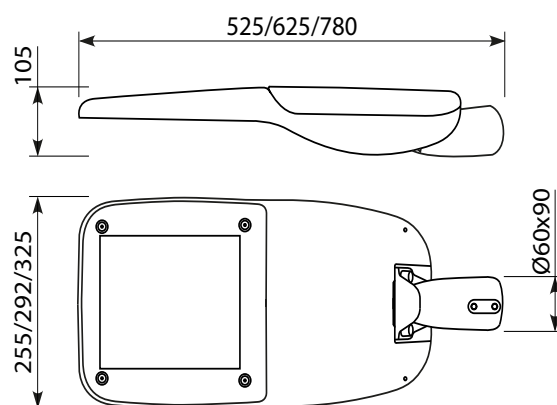

unidades/units: mm



Características

Carcasa:	Aluminio
Cierre:	Cristal templado
Color:	Gris (RAL 9022)
Lámparas:	CREE XT-E
Eficacia nominal:	145 lm/W
IRC:	> 70
Temperatura de color:	3.000/ 4.000/ 5.000 K
Equipo:	Mean Well HLG Protector sobre tensiones de 20 kA
Factor de potencia:	>0.95
Tensión:	90-305 V 50-60 Hz
Protección:	IP 66
Protección contra impactos:	IK 10
Vida útil:	> 100.000 h
Aislamiento:	Clase I
Refrigeración:	Válvula de ventilación

Opcionales

Regulación:	1-10V/ DALI/ PWM/ Inteligente
Sensor:	Movimiento
Wireless:	Punto a punto

Features

Housing:	Aluminium
Closure:	Tempered glass
Colour:	Grey (RAL 9022)
Lamps:	CREE XT-E
Nominal efficacy:	145 lm/W
CRI:	> 70
Colour temp:	3.000/ 4.000/ 5.000 K
Equipment:	Mean Well HLG 20 kA surge protector
Power factor:	>0.95
Input voltage:	90-305 V 50-60 Hz
Protection:	IP 66
Protection against impacts:	IK 10
Life span:	> 100.000 h
Appliance:	Class I
Refrigeration:	Screw vent

Optional

Dimming:	1-10V/ DALI/ PWM/ Smart
Sensor:	Motion
Wireless:	Point by point

REFERENCIA REFERENCE	CÓDIGO CODE	UDS. LEDS LED PCS	POTENCIA WATTAGE	EFICACIA NOMINAL NOMINAL EFFICACY	FLUJO NOMINAL NOMINAL FLUX	PESO WEIGHT
EIT-VENICE3016	10110032	16	30 W	135 lm/W	4.050 lm	5 Kg
EIT-VENICE4024	10110033	24	40 W	135 lm/W	5.400 lm	5,2 Kg
EIT-VENICE6024	10110034	24	60 W	125 lm/W	7.500 lm	5,2 Kg
EIT-VENICE8032	10110035	32	80 W	135 lm/W	10.800 lm	6,9 Kg
EIT-VENICE10048	10110036	48	100 W	125 lm/W	12.500 lm	7,1 Kg
EIT-VENICE12064	10110037	64	120 W	145 lm/W	17.400 lm	9,8 Kg
EIT-VENICE15064	10110038	64	150 W	135 lm/W	20.250 lm	10 Kg
EIT-VENICE18064	10110039	64	200 W	125 lm/W	22.500 lm	10,2 Kg