



Proyector LED
LED Floodlight

MODULE


Descripción

Proyector LED de alta calidad fabricado completamente en aluminio. Puede ser utilizado en todo tipo de iluminación exterior como naves industriales, paneles publicitarios de grandes dimensiones, pero esta especialmente diseñado para ser utilizado en grandes áreas como en instalaciones deportivas, entornos portuarios, parkings... Donde son requeridos altos niveles de iluminación y uniformidad.


Description

High quality LED floodlight made entirely of aluminium. It can be used in all types of outdoor lighting such as industrial buildings, large advertising panels, but it is especially designed for use in areas such as sports facilities, port areas, car parks... Where high levels of lighting and uniformity are required.

Fotometrías/ Photometry

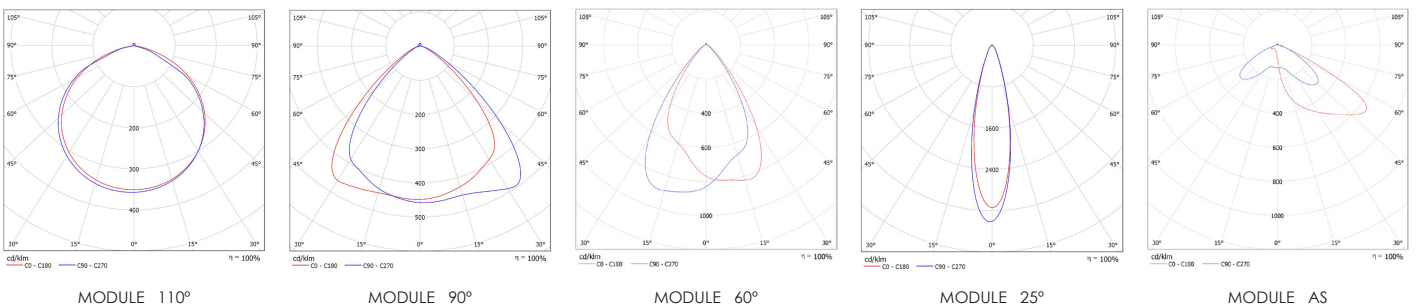

Dimensiones/ Measures

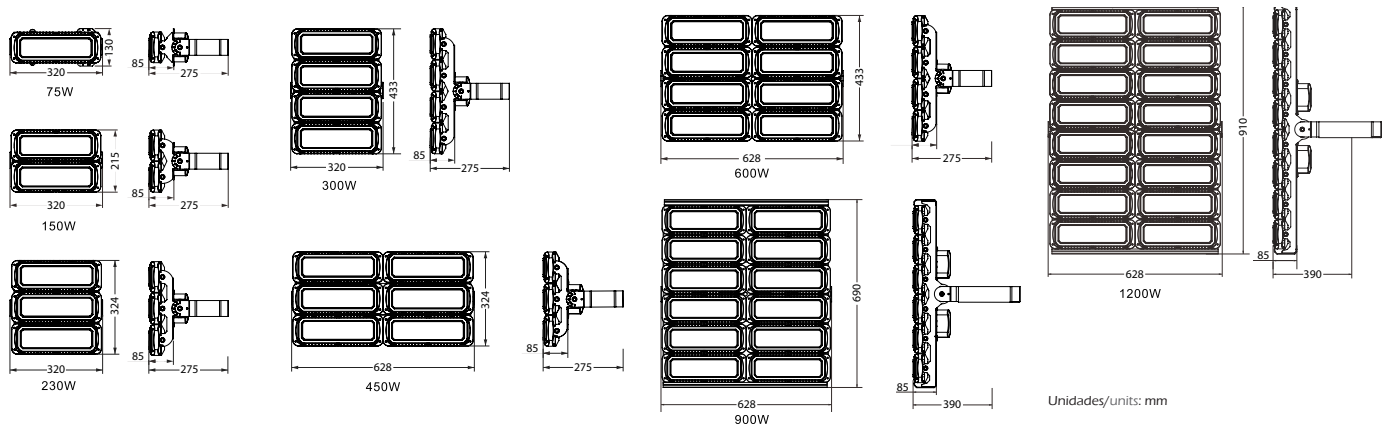



Características

Carcasa:	Aluminio
Color:	Negro
Lámparas:	Philips Lumileds
Eficacia nominal:	150 lm/W
IRC:	70/ 80
Temperatura de color:	4.000/ 5.000 K
Equipo:	Mean Well HLG/ ELG
Factor de potencia:	>0.95
Tensión:	110-240 V 50-60 Hz
Protección:	IP 65
Protección contra impactos:	IK 10
Vida útil:	> 100.000 h
L80B10	60.000 h
Aislamiento:	Clase I
Angulo de apertura:	110°/ 90°/ 60°/ 25°/ Asimétrico

Opcionales

Regulación:	1-10V/ DALI/ PWM
Cristal:	Antideslumbramiento

Features

Housing:	Aluminium
Colour:	Black
Lamps:	Philips Lumileds
Nominal efficacy:	150 lm/W
CRI:	70/ 80
Colour temp:	4.000/ 5.000 K
Equipment:	Mean Well HLG/ ELG
Power factor:	>0.95
Input voltage:	110-240 V 50-60 Hz
Protection:	IP 65
Protection against impacts:	IK 10
Life span:	> 100.000 h
L80B10	60.000
Appliance:	Class I
Beam angle:	110°/ 90°/ 60°/ 25° / Asymmetric

Optionals

Dimming:	1-10V/ DALI/ PWM
Crystal:	Anti-glare

REFERENCIA REFERENCE	CÓDIGO CODE	UDS. LEDS LED PCS	POTENCIA WATTAGE	EFICACIA NOMINAL NOMINAL EFFICACY	FLUJO NOMINAL NOMINAL FLUX	PESO WEIGHT
EIT-MOD75	10126004	91/20	75W	150 lm/W	11.250 lm	3.2 Kg
EIT-MOD150	10126005	182/40	150W	150 lm/W	22.500 lm	4.8 Kg
EIT-MOD230	10126006	273/60	230W	150 lm/W	34.500 lm	6.7 Kg
EIT-MOD300	10126007	364/80	300W	150 lm/W	45.000 lm	8.7 Kg
EIT-MOD450	10126001	546/120	450W	150 lm/W	67.500 lm	13.4 Kg
EIT-MOD600	10126002	728/160	600W	150 lm/W	90.000 lm	17.5 Kg
EIT-MOD900	10126003	1.092/240	900W	150 lm/W	135.000 lm	29.4 Kg
EIT-MOD1200	10126008	1.456/320	1200W	150 lm/W	180.000 lm	38.3 Kg