



eitelux  
Lighting technology

Luminaria vial LED  
LED street light

VEVA - VN

### Descripción

Luminaria de alumbrado vial con un diseño cuidado y elegante que combina perfectamente con cualquier entorno urbano.

Cuerpo de aluminio, reflector de aluminio anodizado y cubierta de vidrio plano templado. Base de acero galvanizado y fijación de aluminio.

Superficie tratada contra la corrosión y sistema de pintura exterior resistente a UV.

Altura de montaje de 4 a 9 metros.

### Description


LED street light with care and elegant design that combines perfectly with any urban environment.

Aluminium body, anodized aluminium reflector and flat tempered glass cover. Galvanized steel plate and extruded aluminium fastening.


Anti-corrosion treatment and UV resistant, exterior paint system.

Assembling height of 4 at 9 metres.


### Fotometrías/ Photometry

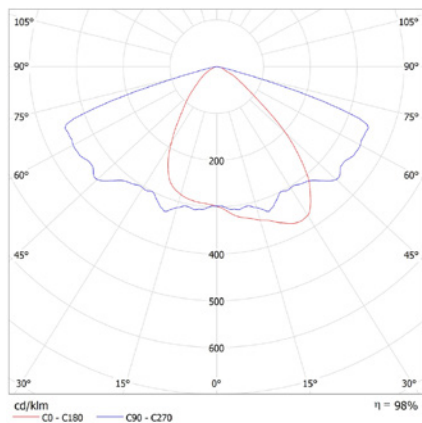

### Dimensiones/ Measures

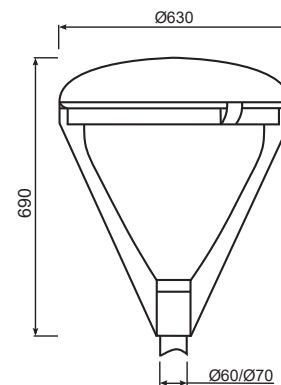

unidades/units: mm

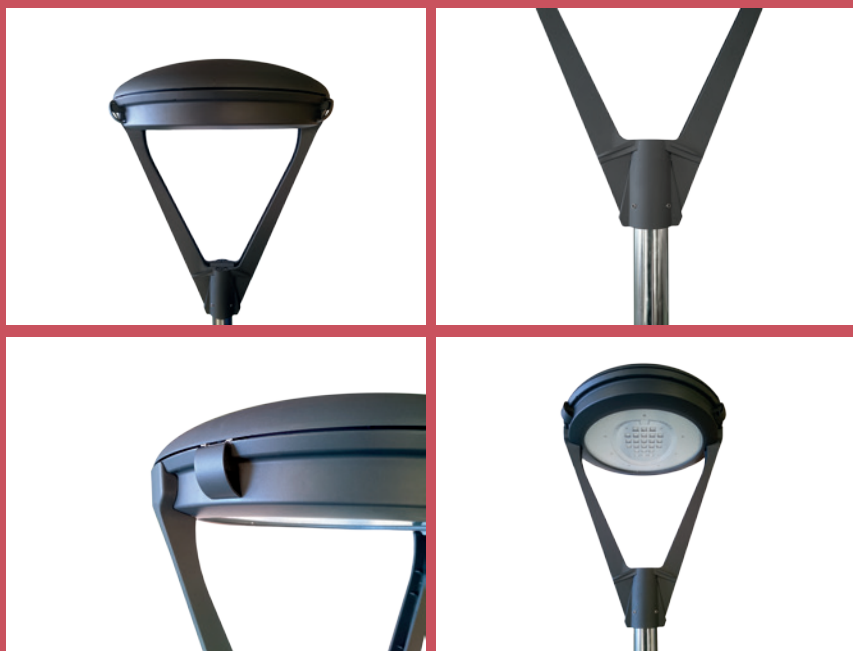

### Características

Carcasa:	Aluminio
Cierre:	Cristal templado
Color:	Negro
Lámparas:	CREE XT-E
Eficacia nominal:	145 lm/W
IRC:	> 70
Temperatura de color:	3.000/ 4.000/ 5.000 K
Equipo:	Mean Well HLG Protector sobre tensiones de 20 kA
Factor de potencia:	>0.95
Tensión:	90-305 V 50-60 Hz
Protección:	IP 66
Protección contra impactos:	IK 10
Vida útil:	> 100.000 h
Aislamiento:	Clase I

### Features

Housing:	Aluminium
Closure:	Tempered glass
Colour:	Black
Lamps:	CREE XT-E
Nominal efficacy:	145 lm/W
CRI:	> 70
Colour temp:	3.000/ 4.000/ 5.000 K
Equipment:	Mean Well HLG 20 kA surge protector
Power factor:	>0.95
Input voltage:	90-305 V 50-60 Hz
Protection:	IP 66
Protection against impacts:	IK 10
Life span:	> 100.000 h
Appliance:	Class I

### Opcionales

Regulación:	1-10V/ DALI/ PWM/ Inteligente
Sensor:	Movimiento
Wireless:	Punto a punto

### Optionals

Dimming:	1-10V/ DALI/ PWM/ Smart
Sensor:	Motion
Wireless:	Point by point

REFERENCIA REFERENCE	CÓDIGO CODE	UDS. LEDS LED PCS	POTENCIA WATTAGE	EFICACIA NOMINAL NOMINAL EFFICACY	FLUJO NOMINAL NOMINAL FLUX	PESO WEIGHT
EIT-VELAVN4024	10110040	24	40W	135 lm/W	5.400 lm	11,5 Kg
EIT-VELAVN6048	10110041	48	60W	145 lm/W	8.700 lm	11,7 Kg